


proofSIGN Certification

Job name : test
Printed by : alprinta gmbh
Proofer : epson stylus pro 4880
Date / Time : Mittwoch, 16. Februar 2011 : 18:38
Proof Target : FMW3.0a - ISO Coated v2 (ECI)

		ΔH					
$\Delta E76(ab)$	Measured Tolerance		Measured Tolerance				
Cyan	0,73	5,00	Pass	0,14	2,50	Pass	
Magenta	0,75	5,00	Pass	0,73	2,50	Pass	
Yellow	1,64	5,00	Pass	0,96	2,50	Pass	
Black	0,87	5,00	Pass	0,21	2,50	Pass	
Grey Balance				0,57	1,50	Pass	
Paper Colour	1,73	3,00	Pass				
All Average	1,52	3,00	Pass				
All Maximum	2,82	6,00	Pass				

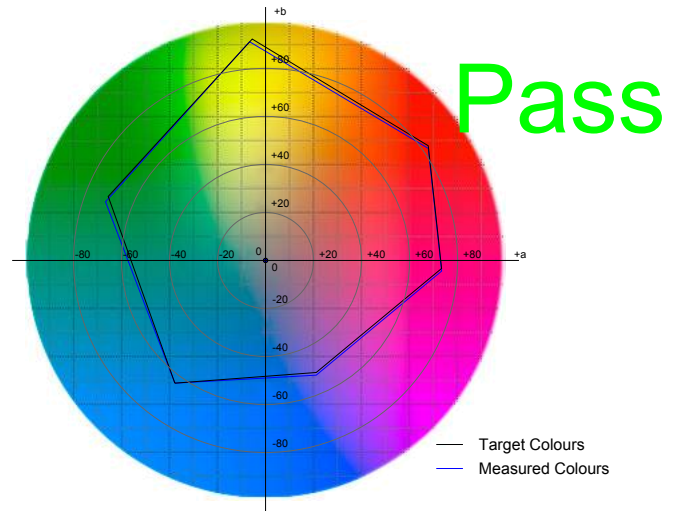


C	M	Y	K	Reference Lab			Measured Lab			ΔH	$\Delta E76(ab)$
100	0	0	0	55,01	-36,96	-50,01	55,24	-37,25	-50,64	0,14	0,73
70	0	0	0	66,88	-24,68	-37,11	66,06	-25,13	-37,66	0,07	1,08
40	0	0	0	79,73	-12,50	-21,76	78,79	-13,07	-21,37	0,69	1,17
20	0	0	0	87,70	-5,75	-11,84	86,46	-5,65	-11,28	0,15	1,36
10	0	0	0	91,47	-2,93	-7,00	89,89	-2,68	-6,63	0,09	1,65
0	100	0	0	48,00	74,00	-2,96	47,99	73,79	-3,68	0,73	0,75
0	70	0	0	60,87	50,64	-6,74	61,21	51,64	-7,10	0,23	1,11
0	40	0	0	76,43	25,80	-6,95	76,94	24,76	-7,05	0,37	1,16
0	20	0	0	86,15	12,09	-5,28	86,09	10,86	-4,92	0,17	1,28
0	10	0	0	90,66	5,95	-3,89	89,92	5,19	-3,54	0,13	1,12
0	0	100	0	89,02	-4,95	92,93	88,16	-5,85	91,86	0,96	1,64
0	0	70	0	90,35	-4,64	62,48	89,66	-5,56	60,99	1,04	1,88
0	0	40	0	92,20	-3,46	31,09	91,37	-4,15	31,50	0,63	1,15
0	0	20	0	93,61	-1,62	13,24	92,76	-1,87	12,75	0,31	1,01
0	0	10	0	94,35	-0,88	5,39	93,39	-0,86	5,10	0,03	1,00
0	0	0	10	88,95	-0,01	-2,07	89,10	0,20	-2,33	0,20	0,37
0	0	0	20	82,77	-0,10	-2,05	84,29	0,30	-2,82	0,37	1,74
0	0	0	40	69,28	-0,13	-2,01	71,09	0,31	-2,29	0,43	1,89
0	0	0	60	54,16	-0,11	-1,15	55,54	0,33	-2,09	0,40	1,73
0	0	0	80	36,64	-0,01	-0,60	37,56	0,56	-0,50	0,56	1,08
0	0	0	100	16,03	-0,01	-0,01	16,55	0,62	0,29	0,21	0,87
0	100	0	100	10,44	13,94	1,30	9,98	16,10	1,91	0,38	2,29
0	70	70	60	33,43	25,37	20,87	34,11	26,34	22,24	0,43	1,81
0	0	70	80	34,47	-3,21	22,31	35,30	-3,20	23,72	0,20	1,64
100	100	0	0	23,91	22,13	-46,08	26,02	21,88	-46,79	0,53	2,24
70	70	0	0	40,93	17,90	-36,62	41,20	18,58	-39,05	0,44	2,54
40	40	0	0	63,70	10,36	-23,79	64,92	10,64	-24,59	0,06	1,48
20	20	0	0	79,43	5,12	-13,70	79,69	4,28	-13,56	0,75	0,89
10	10	0	0	87,18	2,66	-8,23	87,05	2,13	-7,91	0,41	0,63
0	100	100	0	47,02	68,01	47,99	46,92	68,46	46,71	1,31	1,36
0	70	70	0	58,55	47,13	37,80	58,90	47,73	35,74	1,99	2,17
0	40	40	0	74,18	22,97	21,36	74,82	21,84	21,24	0,70	1,31
0	20	20	0	84,99	10,05	9,75	85,34	8,58	9,80	1,10	1,51
0	10	10	0	90,00	4,82	3,67	89,80	3,85	3,69	0,64	0,99
100	0	100	0	50,04	-64,96	27,02	50,91	-65,58	25,34	1,79	1,99
70	0	70	0	62,17	-39,79	20,97	63,07	-40,62	19,26	1,91	2,11
40	0	40	0	76,97	-19,03	10,98	77,77	-20,20	10,10	1,33	1,67
20	0	20	0	86,32	-8,38	4,10	86,91	-8,45	3,98	0,14	0,61
10	0	10	0	90,77	-4,06	0,78	90,74	-4,07	0,86	0,08	0,09
10	6	6	0	88,53	-0,32	-3,21	88,93	-0,55	-3,44	0,20	0,52
20	12	12	0	81,99	-0,82	-4,14	83,21	-0,99	-4,55	0,08	1,30
40	27	27	0	67,69	-1,90	-4,41	69,82	-2,22	-5,77	0,21	2,55
60	45	45	0	52,26	-2,45	-3,55	53,44	-2,93	-4,74	0,24	1,74
80	65	65	0	37,55	-3,88	-3,18	38,15	-4,09	-5,46	1,41	2,37
100	85	85	0	26,33	-6,79	-3,51	26,84	-6,13	-4,65	1,31	1,41
100	0	0	100	10,44	-8,13	-10,25	9,91	-9,17	-11,27	0,17	1,55

proofSIGN Certification

Job name : test
 Printed by : alprinta gmbh
 Proofer : epson stylus pro 4880
 Date / Time : Mittwoch, 16. Februar 2011 : 18:38
 Proof Target : FMW3.0a - ISO Coated v2 (ECI)

		ΔH			
$\Delta E76(ab)$	Measured Tolerance		Measured Tolerance		
Cyan	0,73	5,00	Pass	0,14	2,50
Magenta	0,75	5,00	Pass	0,73	2,50
Yellow	1,64	5,00	Pass	0,96	2,50
Black	0,87	5,00	Pass	0,21	2,50
Grey Balance				0,57	1,50
Paper Colour	1,73	3,00	Pass		
All Average	1,52	3,00	Pass		
All Maximum	2,82	6,00	Pass		

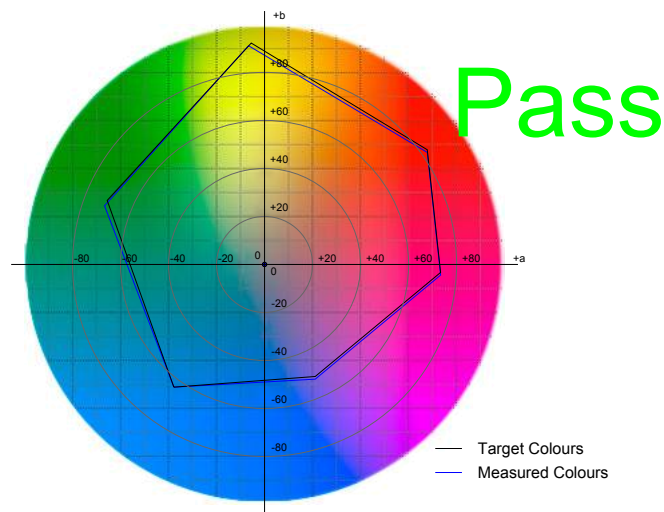

C	M	Y	K	Reference Lab			Measured Lab			ΔH	$\Delta E76(ab)$
20	100	70	60	24,33	32,66	13,13	24,34	32,99	14,53	1,16	1,44
70	0	70	80	24,72	-16,95	7,48	24,72	-18,72	7,56	0,62	1,77
100	100	100	0	22,90	0,17	-0,08	23,67	0,81	-0,94	0,19	1,32
70	70	70	0	38,58	6,62	3,84	39,51	7,29	1,86	2,09	2,29
40	40	40	0	61,57	5,43	3,72	63,73	5,17	2,44	0,98	2,53
20	20	20	0	78,16	2,92	0,89	79,97	2,66	0,06	0,78	2,01
10	10	10	0	86,55	1,54	-0,78	87,25	1,08	-1,21	0,62	0,94
20	70	70	0	53,13	37,75	28,87	54,18	38,65	28,18	1,09	1,54
40	70	70	20	41,60	22,71	16,68	42,87	23,33	15,31	1,48	1,97
40	100	100	20	31,95	39,95	23,99	32,54	39,84	22,79	0,98	1,34
40	100	40	20	32,56	44,43	-1,83	34,25	44,33	-2,24	0,41	1,74
40	40	100	20	51,30	1,32	44,46	52,98	1,03	43,43	0,26	1,99
100	40	100	20	34,60	-36,40	13,83	35,01	-37,74	12,74	1,48	1,78
100	40	40	20	35,98	-26,11	-20,87	36,71	-26,96	-23,05	1,13	2,45
100	100	40	20	20,99	9,52	-23,63	22,33	9,61	-24,61	0,28	1,66
10	40	40	0	71,22	18,86	17,20	72,81	19,19	16,36	0,84	1,83
0	40	100	0	71,29	22,15	73,06	71,90	22,04	72,68	0,01	0,73
0	100	40	0	47,75	71,20	16,22	48,41	71,37	15,10	1,13	1,31
40	100	0	0	38,04	55,36	-21,00	39,65	55,20	-21,70	0,71	1,76
40	0	100	0	73,67	-22,80	67,51	75,11	-23,45	67,78	0,52	1,60
100	0	40	0	52,36	-52,25	-20,22	53,06	-52,06	-21,71	1,46	1,66
100	40	0	0	43,33	-16,97	-48,66	44,42	-16,19	-50,39	1,29	2,19
0	0	0	0	95,03	0,05	-2,14	93,31	0,29	-2,13	0,24	1,73
0	0	100	100	15,75	-3,13	11,63	16,20	-3,12	14,41	0,66	2,82
0	70	0	60	34,71	28,56	-4,08	35,44	29,64	-4,38	0,14	1,34
70	0	0	80	25,89	-10,97	-14,41	26,19	-11,55	-15,40	0,14	1,19